

gateway SERIES

Next Generation alkaline electrolyzers
for small-to-medium scale applications.



modular and
configurable
system



Fully
Automated
remote operation



Full Maintenance
support



High purity
Hydrogen



RES - Following
in dynamic
operation



Low CAPEX

Technical specifications

Product	Gateway 200	Gateway 400	Gateway 800	Gateway 1600	Gateway 2000
Hydrogen hourly production rate [Nm ³ /h]	200	400	800	1600	2000
Hydrogen daily production rate [kg/day]	432	864	1728	3456	4320
Hydrogen pressure [barg]	30	30	30	30	30
Hydrogen purity [%] *	> 99.999%	> 99.999%	> 99.999%	> 99.999%	> 99.999%
Installed electrical power [MVA]	1.2	2.4	4.8	9.6	12
Stack consumption [kWh/Nm ³]	4.59	4.59	4.59	4.59	4.59
System efficiency (HHV) [%]	69.4%	69.4%	69.4%	69.4%	69.4%
System efficiency (LHV) [%]	58.7%	58.7%	58.7%	58.7%	58.7%
Operating range [%]	20-100%	10-100%	5-100%	5-100%	5-100%
Electrolyte	KOH	KOH	KOH	KOH	KOH
Electrical interface	Low-Voltage substation	Low-Voltage substation	Low-Voltage substation	Low-Voltage substation	Low-Voltage substation
Tap water requirement [l/h]	328	656	1312	2624	3280
System installation location	Outdoors (containerized)	Outdoors (containerized)	Outdoors (containerized)	Outdoors (containerized)	Outdoors (containerized)
Equipment footprint incl. maintenance zones [m ²]	155	310	620	1240	1550
Ambient temperature range [°C] **	-20 to +40	-20 to +40	-20 to +40	-20 to +40	-20 to +40
Communication interface	OPC UA	OPC UA	OPC UA	OPC UA	OPC UA

* Target purity achievable with optional purification system

** Target temperature range available with optional extra package - Standard: +5 to +40 °C

Scope of delivery

Stack and Balance-of-Stack:


- Electrolyser stacks
- Gas separation system
- Power rectifier
- Control system
- Lye loop

Balance-of-Plant:

- Nitrogen purge system
- Safety system
- Backup power system
- Vent stacks
- System (rectifier, stack, gas) cooling

gateway
SERIES
200

stargate
hydrogen

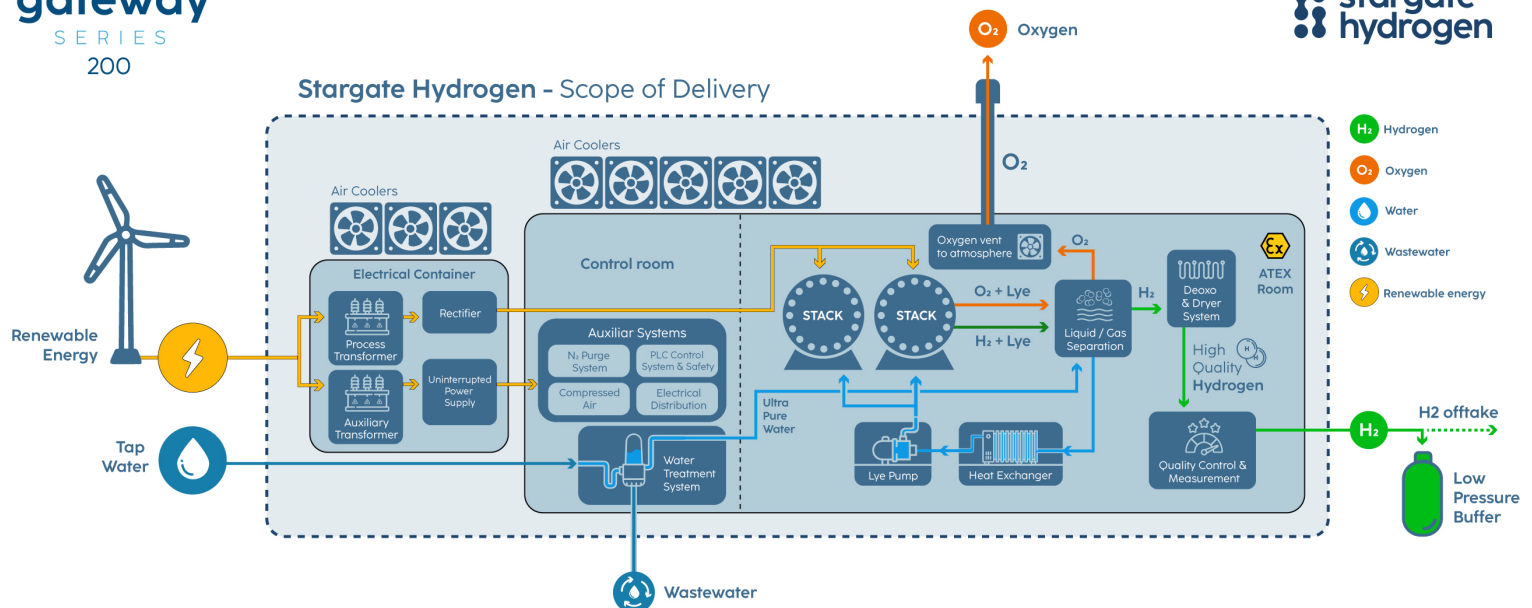

Optional extras

- Gas purification system
- Water purification system
- Process air compressor
- Wasteheat re-use system
- Low temperature package
- MV Transformer & switchgear
- Intercontainer process & electrical connections
- Hydrogen storage system
- Compressor system (up to 1000 barg)

Certification

- Pressure Equipment Directive 2014/68/EU
- Machinery Directive 2006/42/EC
- Low Voltage Directive 2014/35/EU
- EMC Directive 2014/30/EU
- ATEX Directive 2014/34/EU
- ISO 22734-1

Disclaimer:

Specifications are subject to change.

Stargate Hydrogen reserves the right to make changes or updates at any time without prior notice